


## パターンの拡幅や基板の厚銅化、多層化が不要で基板の大電流化に対応

High current on PCB without the need for pattern widening, a heavy copper PCB or a multi-layered PCB.


### ■定格電流(※)にあわせて6種類のサイズをシリーズ化

【 60 A 】

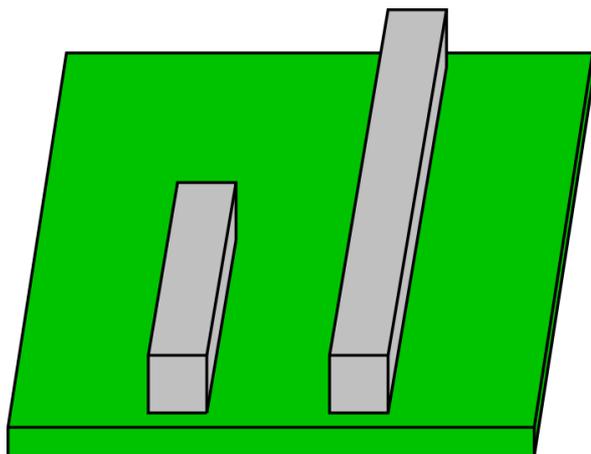


- 1.5 × 20 mm
- 1.5 × 30 mm

【 100 A 】

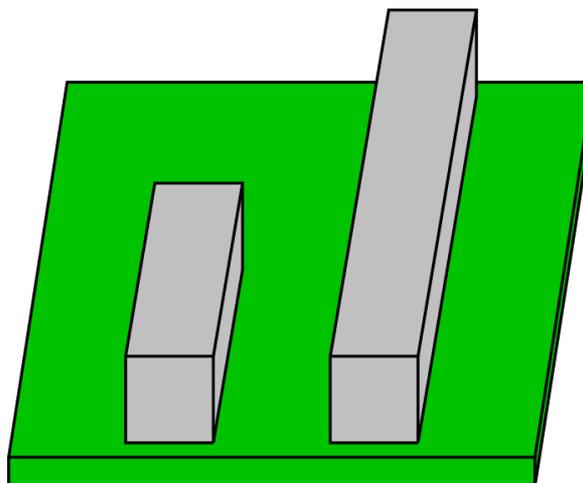

- 2.0 × 20 mm
- 2.0 × 30 mm


【 150 A 】

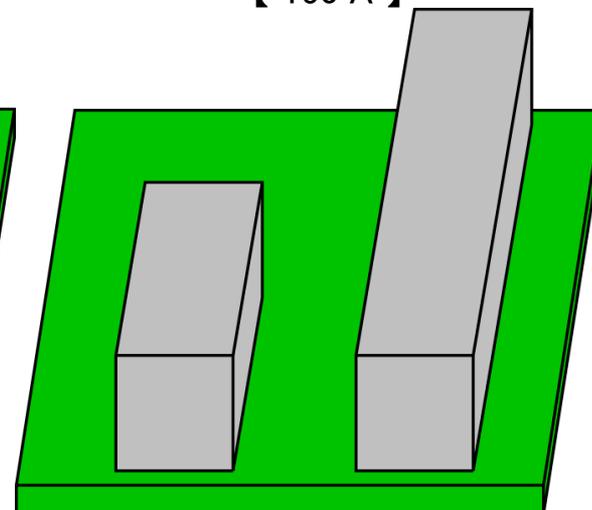

- 2.5 × 20 mm
- 2.5 × 30 mm

※定格電流(最大)は参考値

## 製品仕様

型番	SD02112-2K	SD02113-2K	SD02114-2K	SD02115-2K	SD02116-2K	SD02117-2K
寸法						
	□ 1.5 × 20	□ 1.5 × 30	□ 2.0 × 20	□ 2.0 × 30	□ 2.5 × 20	□ 2.5 × 30
定格電流(最大)※	60A	60A	100A	100A	150A	150A
材質	タフピッチ銅(C1100) Tough-Pitch Copper					
表面処理	スズめっき tin plating					
基板への実装	表面実装 SMT					
納入形態	エンボスキャリアテープ Embossed carrier tape					

※定格電流(最大)は参考値

## 製品特徴

	RoHS指令 対応製品		JIS C 0806-3 (表面実装部品の 連続テープによる 梱包)に準拠
--	----------------	---	--

※製品についてご質問・ご不明な点ございましたらお問い合わせ下さい。