


■ Series of 12 different sizes to match the rated currents of 60A, 100A, and 150A

High current on PCB without the need for pattern widening, a heavy copper PCB or a multi-layered PCB.

◆ High current on PCB without the need for PCB Processing




pattern widening ✗

heavy coppering ✗

Multilayering ✗

* Rated current (maximum) is a reference value

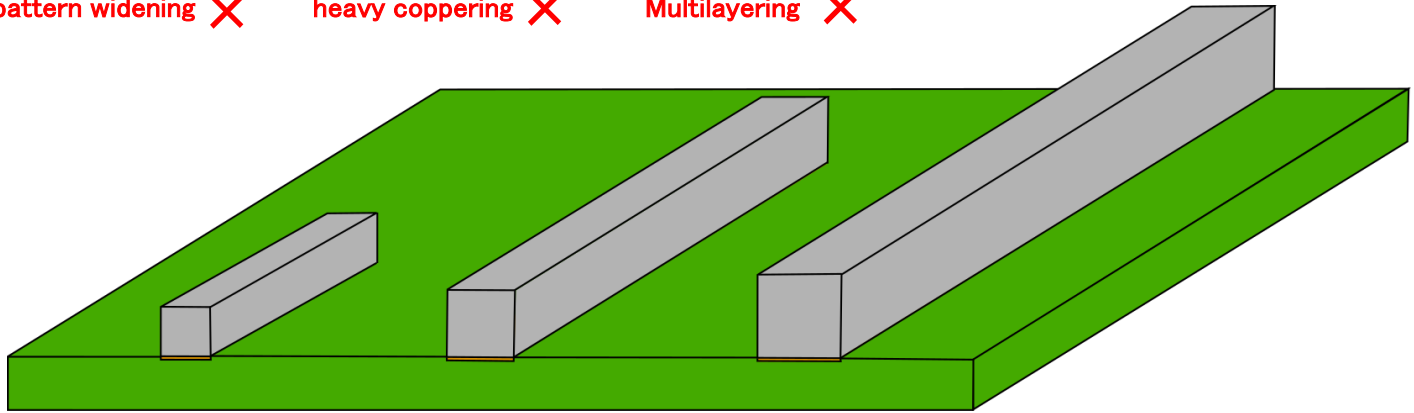

【60A □1.5mm】 【100A □2.0mm】 【150A □2.5mm】

SMD Busbar

Product Specifications

□Size	Length	Product number	Rated current (maximum)*	Material	Delivery form
□1.5 mm	10 mm	SD02121-2K	60A	C1100 Tough-Pitch Copper	Embossed carrier tape
	15 mm	SD02122-2K			
	20 mm	SD02112-2K			
	30 mm	SD02113-2K			
□2.0 mm	10 mm	SD02123-2K	100A		
	15 mm	SD02124-2K			
	20 mm	SD02114-2K			
	30 mm	SD02115-2K			
□2.5 mm	10 mm	SD02125-2K	150A		
	15 mm	SD02126-2K			
	20 mm	SD02116-2K			
	30 mm	SD02117-2K			

* reference value

Product Features



※Please contact us if you have any questions or concerns about our products.